

Over 30 Years of Building Quality Equipment!



DRAIN LINE JETTING EQUIPMENT

TIER 4 RATED
CLEANS 2"-12" LINES

HotJet's Trailer Mounted Sewer and Drain Line Jetters are engineered for the Professional Rooter and Plumber and will tackle the toughest blockages! Easy to operate and priced right! Will handle small lateral lines with the jumper hose assembly as well as larger lines up to 12". Includes our Exclusive Engineering Features and the Best Warranty in the Industry!



| Trailer Colors | |
|---------------------------------------|---------------|
| ■ | Red |
| ■ | Black |
| ■ | Blue |
| ■ | Green |
| ■ | Safety Yellow |

| Part Number | Engine | Output* | Other Specifications |
|-------------|-------------|-------------------|--|
| HJDTA8040K | 26HP Kohler | 8GPM @ 4,000 PSI | <ul style="list-style-type: none"> • Drive Triple V-Belt • Trailer Size 5' x 12' Deck • Tandem Axle, Powder Coated • Axle Rating 2 x 3,500 LB. |
| HJDTA8040KK | 29HP Kubota | 8GPM @ 4,000 PSI | |
| HJDTA9038K | 26HP Kohler | 9GPM @ 3,850 PSI | |
| HJDTA1038KK | 29HP Kubota | 10GPM @ 3,850 PSI | |

*Output +/- 5% PSI and GPM vary as per elevation, engine RPM and nozzle size.

Exclusive Engineering Features

Dual Filter Intake System

We pre-plumb the pump intake so the draw water from the tank is dual filtered - one 80 mesh filter and the other a 50 mesh filter to protect the pump. This has proven to dramatically increase the pump life and reduce down time.

Pump

The pump systems we use are manufactured by General Pumps. The Emperor Series General Pump are proven with literally thousands in service worldwide. They are easy and inexpensive for service and we back them with a 10 year warranty.

Pump Saver System

We engineer all jetter trailers with our "pump saver system" - that when the hose flow is released, the bypass water re-circulates back to the water tank. This keeps the head of the pump cool extending its life substantially.

TBDS™ (Total Belt Driven System)

All components are belt driven. The pump is Triple-V-Belt Driven. Belt driven reduces vibration and allows the pump to run at 1/2 RPM. This extends operational life, especially vs. gear driven power plants.

Chemical Application

The equipment operator can control the concentration levels at the machine and controls the chemical injections depending on the job needs.


Quick Antifreeze System

Our jetter units come with our quick antifreeze system where you close one ball valve and open the antifreeze ball valve - then run the machine for 30 seconds and the entire system is antifreezed. Start the machine - then recapture the antifreeze in the antifreeze tank and re-attach the jetter nozzle and you are ready to jet!

HOTJET D

Diesel Series • Hot Water Jetter

Over 30 Years of Building Quality Equipment!

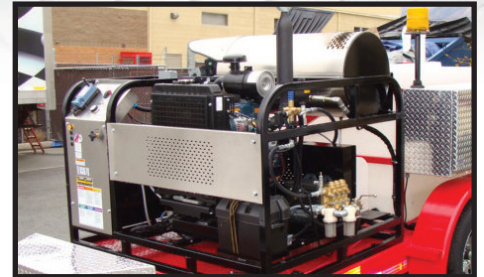

POWERFUL • BUILT TO LAST • BEST WARRANTY

The Professional's Choice for cleaning drain/sewer lines from 2-12"! Built for the professional with **BEST IN CLASS MOTOR, PUMP, HOSE REEL and TRAILER**. This drain and sewer cleaning system is custom from the ground up and engineered for ease of service with ultra duty construction throughout. Super dependable Vanguard Power Plant (made by a Division of Toyota) - combined with General's Premium Emperor Series Pump is a bullet proof engineering design. Add the Jumper Hose Reel for laterals and this unit becomes 2 jetters in one! With the Warthog Nozzle this unit has plenty of power to cut roots and nearly any blockage.

GENERAL SPECIFICATIONS

- 330 or 660 Gallon Water Capacity
- Molded HDP Water Tank(s)
- Nema 4 Rated Control Panel
- Low Water "Shut Off" Feature
- 10' Safety Colored Leader Hose
- 2" x 36" Tiger Tail Hose Protector
- Powered, Variable Speed Hose Reel with 300' of 3/8" Jetting Hose Rated @ 16,000 PSI Burst Pressure
- Adjustable Pressure Relief/Control Valve(s)
- Adjustable Pulsation System with Control
- Hose Reel with 100' of 3/4" Supply hose
- Rotary Beacon Light
- "Fast Fill" for Hydrant Hook-Up

PUMP

- "Run-Dry" Capable General Pump 8 GPM @ 4000 PSI or 9.5 GPM @ 3,850 PSI
- Triple Power Belt Driven
- Dual Safety Rupture Disks and Pump Saver System
- Rear Throttle Control

DISTRIBUTED BY:

MOTOR DESCRIPTION

- Choice of 26HP Kohler or 29HP Kubota
- Low Noise Muffler
- EPA Tier 4 Rated
- Low Engine Oil/High Temperature Auto Shutdown System
- 24 Gallon Diesel Fuel Tank
- Large Battery Box

TRAILER DESCRIPTION

- Rugged, Compact Specially Engineered Trailer to Haul the Equipment and Water Load
- Leaf Spring Axles Cushion and Distribute the Weight for Easy Towing
- 5'x12' Tandem Axle
- Tandem Axle (2 x 3,500 lb)
- Dual Axle Brake - DOT Legal in all 50 States
- Full Premium Powder Coat

NOZZLES

- Warthog
- Lazer
- Ram

UPGRADES AVAILABLE

- Portable Reel with 100' 1/4" Jetting Hose
- 12 Volt Rear Power Connection for Spot Light or Camera
- Safety Cone Holder
- Rear LED Lighting
- Remote Control - Solid State Wireless Unit up to 300'
- 2nd Hose Reel for Soap Injection

OVERALL DIMENSIONS

- | | |
|----------------------|--------------------|
| • Overall Length | 16' 6" incl. hitch |
| • Deck Length | 12' |
| • Height | 8' w/safety light |
| • Overall Deck Width | 7' |
| • Weight Dry | 2,950 lbs |
| • Weight Full Load | 6,100 lbs |



14773 Heritage Crest Way • Riverton, UT 84065
1-800-624-8186

www.HotJetUSA.com

Ref. 11232015